







NOTE: + TERMINAL RATED 12 - 20 VDC UNREGULATED (100mA).



MODEL	VOLTAGE
900MA	24 VAC
900MB	120 VAC

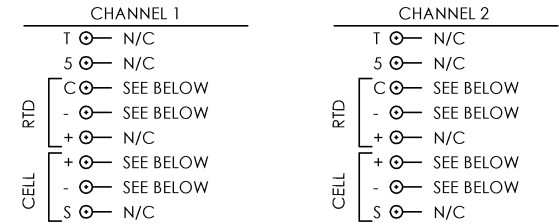

THORNTON TYPE 208 CELL WIRE CONNECTIONS (TYPICAL FOR CHANNELS 1 AND 2)

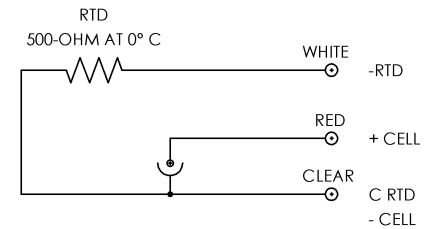

MATING CONNECTORS ARE WEIDMULLER TERMINAL TYPE BL
 BL4 - 4 PIN, CATALOG NO. 12593.6
 BL8 - 8 PIN, CATALOG NO. 12597.6
 BL9 - 9 PIN, CATALOG NO. 12598.6

NOTE: WEIDMULLER MATING CONNECTORS ARE SIDE STACKABLE.

TOLERANCES UNLESS OTHERWISE SPECIFIED		JPC CONTROLS		102 COMPASS PT. DR., STE. D, ST. CHARLES, MO. 63301 (636) 946-3300 Fax (636) 724-2492 www.jpcontrols.com				
PROCON 900MA/900MB RESISTIVITY MONITOR REAR PANEL								
APPROVAL		ENGR	DATE	DIVN BY	MPJ	DATE 02/18/02	SCALE NONE	CHKD BY
ALL DIMENSIONS ARE IN INCHES		GA	DATE	SHEET	1 OF 1	13	090010	20 01
PATH = E:\CC\DT900\900MB11.SLDDRW								